

Rivetting machine 500 mm depth S.441



S.441 Rivetting machine

Rivetting machine with long arm of 500mm for the application of the rivets on the sides of tins and boots. The same rivet makes the perforation of the material during the application.

MODELS

Elettropneumatic: tension 220V singlephase, pression 6 bar.
Cod.80441942/Cod.80441952

Electric with -INVERTER: tension 220 V singlephase
Cod.804419471/Cod.804419571


The two versions are provided with an electronic program for a complete test of the cycle;(starting signals.security devices, electropneumatic valves that are completely adjusted by a microprocessor.) A lighting display with a counterpieces function allows the visualisation of any possible anomaly that the microprocessor could find.

A safety device with mobile screen guarantees the operator' incolumity protecting the application zone.

ACCESSORIES :

spot light point.

Cod.80165U00V

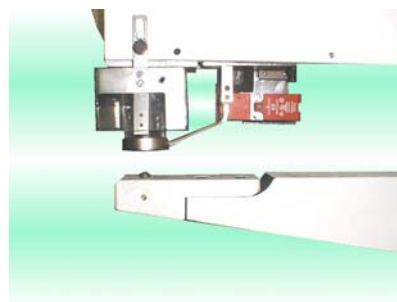

CHARACTERISTICS		PEDAL	ELECTROPNEUMATIC	MOTOR
Theor speed rate	c/1'	//	100	180
Working clearance	mm	//	30	
Depht	mm	//	500	
Working plane h	mm	//	1200	
Overall dimension	mm	//	600x1000x1650	
Weight	Ks	//	85	95
Air consumption	l/6bar	//	3 NI/cycle	//
Motor rating	Kw	//	//	0.37 Threephase
Tension		//	220 V. singlephase	

IAMET Srl

Via Cascina dei Ferrandi n° 85 21044 Cavaria con Premezzo (Va) ITALIA
TEL.+39 0331 217236 e-mail: info@iametsrl.com