

PIERCING EYELETING MACHINE

for the application of the eyelets on tins and folders **S.479**

Selfpiercing eyeletting machine with feeding by vibrator of eyelets (finger hole eyelets) for the application on tins and folders and on shoe boxes and for this version the application it is possible to set eyelets on the edge and on the bottom of the cover.

MODELS :

Electrical version :

The mechanical application is actioned by the motor-gear group. the machine is completely equipped with a feeder with an electrovibrator which guarantees a capacity and continuity in feeding.

The body of machine is in normalized steel set on a table with wheels for short movements.

Tension 220V singlephase with **INVERTER**,


The version is equipped with sensors for the control of passage of eyelets, the electronic installation manages the working cycle and in case of anomalies communicates to the operator, through the display located on the control's panel, the operation set the inconvenient.

SECURITIES FOR THE OPERATOR :

Pedal's control with mobile security screen

ACCESSORIES :

Spot light (green light Led) Cod.80165U00V

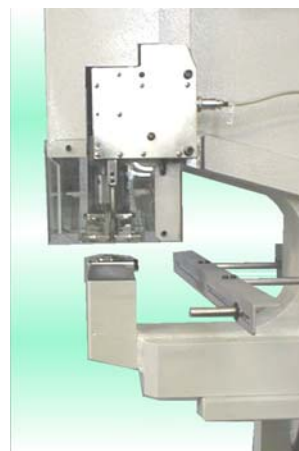

CHARACTERISTICS		MOTOR
Theor speed rate	c/1'	135
Working clearance	mm	10
Applicacion depth	mm	250
Working plane height	mm	1150
Overall dimension	mm	700x900x2050
Weight	Kp	250
Motor rating	Kw	0.75
Tension electronic machine with INVERTER		220 V. singlephase

IAMET Srl

Via Cascina dei Ferrandi n° 85 21044 Cavaria con Premezzo (Va) ITALIA
 TEL.+39 0331 217236 e-mail: info@iametsrl.com