

Rivetting machine 500 mm depth S.441



S.441 Rivetting machine

Rivetting machine with long arm of 500mm for the application of the rivets on the sides of tins and boots. The same rivet makes the perforation of the material during the application.

MODELS

Elettropneumatic: tension 220V singlephase, pression 6 bar.
Cod.80441942/Cod.80441952

Electric with -INVERTER: tension 220 V singlephase
Cod.80441947I/Cod.80441957I

The two versions are provided with an electronic program for a complete test of the cycle;(starting signals.security devices, electropneumatic valves that are completely adjusted by a microprocessor.) A lighting display with a counterpieces function allows the visualisation of any possible anomaly that the microprocessor could find.

A safety device with mobile screen guarantees the operator' incolumity protecting the application zone.

ACCESSORIES :

spot light point.

Cod.80165U00V



CHARACTERISTICS		PEDAL	ELECTROPNEUMATIC	MOTOR
Theor speed rate	c/1'	//	100	180
Working clearance	mm	//	30	
Depht	mm	//	500	
Working plane h	mm	//	1200	
Overall dimension	mm	//	600x1000x1650	
Weight	Ks	//	85	95
Air consumption	l/6bar	//	3 NI/cycle	//
Motor rating	Kw	//	//	0.37 Threephase
Tension		//	220 V. singlephase	

IAMET Srl

Via Cascina dei Ferrandi n° 85 21044 Cavaria con Premezzo (Va) ITALIA
TEL.+39 0331 217236 e-mail: info@iametsrl.com

PIERCING EYELETTING MACHINE

for the application of the eyelets on tins and folders **S.479**

Selfpiercing eyeletting machine with feeding by vibrator of eyelets (finger hole eyelets) for the application on tins and folders and on shoe boxes and for this version the application it is possible to set eyelets on the edge and on the bottom of the cover.

MODELS :

Electrical version :

The mechanical application is actioned by the motor-gear group. the machine is completely equipped with a feeder with an electrovibrator which guarantees a capacity and continuity in feeding.

The body of machine is in normalized steel set on a table with wheels for short movements.

Tension 220V singlephase with **INVERTER**,

The version is equipped with sensors for the control of passage of eyelets, the electronic installation manages the working cycle and in case of anomalies communicates to the operator, through the display located on the control's panel, the operation set the inconvenient.

SECURITIES FOR THE OPERATOR :

Pedal's control with mobile security screen

ACCESSORIES :

Spot light (green light Led)


Cod.80165U00V



CHARACTERISTICS		MOTOR
Theor speed rate	c/1'	135
Working clearance	mm	10
Applicacion depth	mm	250
Working plane height	mm	1150
Overall dimension	mm	700x900x2050
Weight	Kp	250
Motor rating	Kw	0.75
Tension electronic machine with INVERTER		220 V. singlephase

IAMET Srl

Via Cascina dei Ferrandi n° 85 21044 Cavaria con Premezzo (Va) ITALIA
TEL.+39 0331 217236 e-mail: info@iametsrl.com

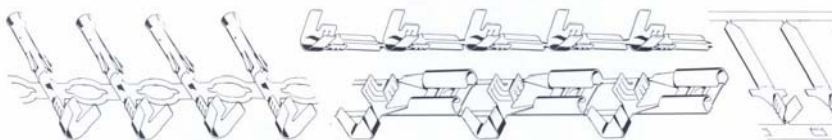

S.721 Crimping machine-Motor control

Universal Crimping machine for application of terminals (miniapplicators) with automatic process of the terminals from left side (lateral position), from back (linear position).

MODELS :

Electric: tension 380V threephases

Cod..80721989

Motor's machine with screw reduction without end with electronic control of the application cycle. The equipment is provided with an electronic program. The two versions are provided with an electronic program for a complete test of the cycle; (starting signals, security devices, electropneumatic valves that are completely adjusted by a microprocessor.) A lighting display with a counterpieces function allows the visualisation of any possible anomaly that the microprocessor could find.

A transparent security's screen together with a security switch guarantees the incolumity of the operator protecting the application's zone.



CHARACTERISTICS		ELETTRICAL	
Theor speed rate	c/1'	200	
Trip	mm	40	
Working clearance	mm	8	
Motor rating	Kw	0.75	
Crimping strength	Kp	2000	
Crimping Section	mmq	0.12÷6	
Overall dimension	mm	Version side feed 300x650x875	Version end feed 600x500x875
Weight	Kp	90	
Tension		380 V. single phase	

IAMET Srl

Via Cascine dei Ferrandi N° 85 21044 Cavarina con Premazzo (Va) ITALIA
TEL.+39 0331 217236 e-mail: info@iametsrl.com



S.807 Piercing eyeletting machine with double feeding eyelet and washer.

Selfpiercing eyeletting machine for application in an automatic of eyelets and washer with neck on canvans for autotraccion, agriculture, cover tennis's fields ecc. The machine carries out contemporary the piercing of material and the application of the two pieces(eyelet and washer).

MODELS

Electropneumatic with -INVERTER: tension of 220 V singlephase, pression 5÷6 bar Cod.80807982I

The body is in standardized steel mounted on a table provided of wheels for short movements. The progress of the washer arrives through a pneumatic cylinder, the application is mecanic actioned by the motor gear group , the vibrator feeders guarantee a good capacity and continuity in alimentation.

The unity is provided with an electronic program for the complete management of the application cycle; (start signals, cycle stop, antirepetition of the application, sensors for the control passage of eyelets and washers, security switch, ecc. are entirely governed by a microprocessor.) A lighting display with counterpieces function gives the possibility to visualize the possible anomalies that the microprocceding could notice .

Fixed screen with a security switch guarantee the operator incolumity protecting the applicacion's zone, in case of removal of the same.

Version for automatic lines:

Cod.80807981I

Version manual utilisation



CHARACTERISTICS		MOTOR
Theor speed rate	c/1'	135
Working clearance	mm	10
Applicacion depth	mm	250
Working plane height	mm	1000
Overall dimension	mm	800x750x1850
Weight	Ks	300
Motor rating	Kw	0.75
Tension electronic machine with INVERTER		220 V. singlephase
Pneumatic's lines alimentation		5÷6

IAMET Srl

Via Cascina dei Ferrandi n° 85 21044 Cavaria con Premezzo (Va) ITALIA
TEL.+39 0331 217236 e-mail: info@iametsrl.com



S.828 Eyeletting machine

Multiple eyeletting machine with double feeder with contemporary feeding of four eyelets, suitable for application of lever mechanisms on cardboard files. The eyelet makes the hole in the material during the application.

The machine is equipped only for one type eyelet and mechanism, consequently the interaxe of application is fixed.


Models

Electric with -INVERTER: tension 220 V singlephase, pressure 6 bar. Cod.80828988I

The electric version is provided with an electronic program for a complete application's test; (starting signals, security device, electropneumatic's valves are completely governed by a microprocessor.)

A lighting display with counterpieces function allows the visualisation of any kind of anomaly that the microprocessor could find.

A safety device with a mobile screen guarantees the operator incolumity protecting the application zone.

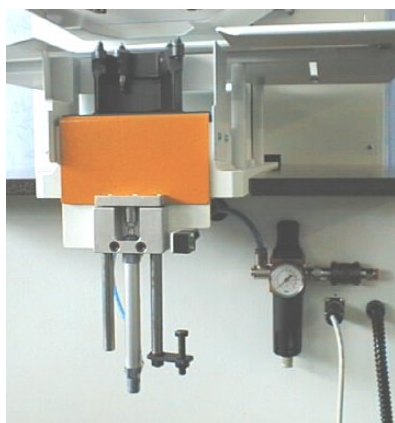

CHARACTERISTICS		MOTOR
Theor speed rate	c/1'	140
Working clearance	mm	12
Application's depth	mm	500
Working plane height	mm	1050
Overall dimension	mm	700x1100x1800
Weight	Ks	325
Air consumption	NI/6ba	0.25 NI/cycle
Motor rating	Kw	0.75 Threephase
Tension		220 V. singlephase

IAMET Srl

Via Cascina dei Ferrandi n° 85 21044 Cavarina con Premezzo (Va) ITALIA
TEL.+39 0331 217236 e-mail: info@iametsrl.com

S.903P Press

Press for the utilisation of dies model "C", like eyelets, rivets, presson buttons, punches , ecc.

VERSIONS

Pedal: version with mecanical action that with a light phisical action develops remarkable application strength.

Cod. 80903P41

Electropneumatic: tension 220V singlephase, pression 6 bar.

Cod. 80903P42

Electric with -INVERTER: tension 220 V singlephase

Cod. 80903P47I

Both versions are provided with an electronic program for a complete test of cycle; (starting signals, the security devices, electropneumatic's valves, are completely adjusted by a micro-processor.). A lighting display with a counterpieces's function, allows the visualisation of any possible anomaly that the microprocessor could find.

A safety device with mobil screen guarantees the operator's incolumity protecting the zone of application.

ACCESSORIES :

Support plane,
Spot light (green light Led)

Cod.80980010

Cod.80165U00V



TECHNICAL CHARACTERISTICS		PEDAL	ELECTROPNEUMATIC	MOTOR
Theor speed rate	c/1'	//	100	180
Working clearance	mm	15	10	
Depht	mm		180	
Working plane hate	mm		970	
Overral dimension	mm	500x650x1490	550x650x1370	
Weight	Kg	70	85	95
Air consumption	NI/6bar	//	3 NI/cycle	//
Motor rating	Kw	//	//	0.37 Triphase
Tension			220 V. singlephase	

IAMET Srl

Via Cascina dei Ferrandi n° 85 21044 Cavaria con Premezzo (Va) ITALIA

TEL.+39 0331 217236 e-mail: info@iametsrl.com



S.907 Eyeletting machine

Eyeletting machine for application of eyelets and of parts B/D of the presson buttons on leather, clothes where it is necessary to pierce the material during the application.

MODELS

Treadle control: a considerable application is obtained with a slightest effort during the application

Cod.80907941/Cod.80907951

Electropneumatic: tension 220 V singlephase, pression 6 bar.
Cod.80907942/Cod.80907952

Electric with -INVERTER: tension 220 V singlephase
cod.80907947I/Cod.80907957I

The two versions are provided with an electronic program for a complete test of the cycle; (starting signals, security device, electropneumatic valves, are completely adjusted by a microprocessor). A lighting display with a counterpieces function allows the visualisation of any possible anomaly that the microprocessor could find.

A safety device with a mobile screen guarantees the operator incolumity protecting the application zone.

ACCESSORIES :

support palte
spot light point

Cod.80980010
Cod.801655U00V



CHARACTERISTICS		PEDAL	ELECTROPNEUMATIC	MOTOR
Theor speed rate	c/1'	//	100	180
Working clearance	mm	15	10	
Depht	mm	180		
Working plane h	mm	970		
Overall dimension	mm	500x650x1490	550x650x1370	
Weight	Kp	70	85	95
Air consumption	NI/6ba	//	3 NI/cycle	//
Motor rating	Kw	//	//	0.37 Triphase
Tension		//	220 V. singlephase	

IAMET Srl

Via Cascina dei Ferrandi n° 85 21044 Cavaria con Premezzo (Va) ITALIA
TEL.+39 0331 217236 e-mail: info@iametsrl.com



S.911 Piercing eyeletting machine

Piercing eyeletting machine for the application of eyelets on shoes, leathers, clothes, etc. where it is necessary to pierce the material during the application.

MODELS

Pedal: version with mechanical control that, with a slightest effort, develops a remarkable strength during the application.

Cod.80911941/Cod.80911951

Elettropneumatic: tension 220V singlephase, pressure 6 bar.

Cod.80911942/Cod.80911952

Elettrical with -INVERTER: tension 220 V singlephase

Cod.80911947/Cod.80911957

Both the versions are provided with an electronic program for the complete control of the application cycle; (starting signals, cycle end, antirepetition of application, security dispositive, etc. are completely governed by a microprocessor.) A lighting display with counterpieces function allows to visualise the possible anomalies that the microprocessor could find.

The security's device with mobile screen guarantees the operator incolumity protecting the application zone.

ACCESSORIES

Support plate
Spot light point

Cod.80980010A
Cod.80165U00V



CHARACTERISTICS	PEDAL	ELETTROPNEUMATIC	MOTOR	
Theor speed rate	c/1'	//	100	180
Working clearance	mm	15	10	
Depht	mm	180		
Working plane height	mm	970		
Overall dimension	mm	500x650x1490	550x650x1370	
Weight	Kp	70	85	95
Air consumption	NI/6bar	//	3 NI/cycle	//
Motor rating	Kw	//	//	0.37 Triphase
Tension		//	220 V. singlephase	

IAMET Srl

Via Cascina dei Ferrandi n° 85 21044 Cavaria con Premezzo (Va) ITALIA
 TEL.+39 0331 217236 e-mail: info@iametsrl.com



S.917-A2 Eyeletting machine


Eyeletting machine for simultaneous application of two eyelets at fixed distance on pierced parts or on leather, clothes, paper, which allows the drilling of the manufactured article during the application

MODELS

Electropneumatic: tension 220 V singlephase, pression 6 bar.
Cod.80917943/Cod.80917953

Electric with -INVERTER: tension 220 V singlephase
cod.80917948/Cod.80917958I

The two versions are provided with an electronic program for a complete test of the cycle;(starting signals,security device, electropneumatic valves, are completely adjusted by a microprocessor).A lighting display with a counterpieces function allows the visualisation of any possible anomaly that the microprocessor could find.

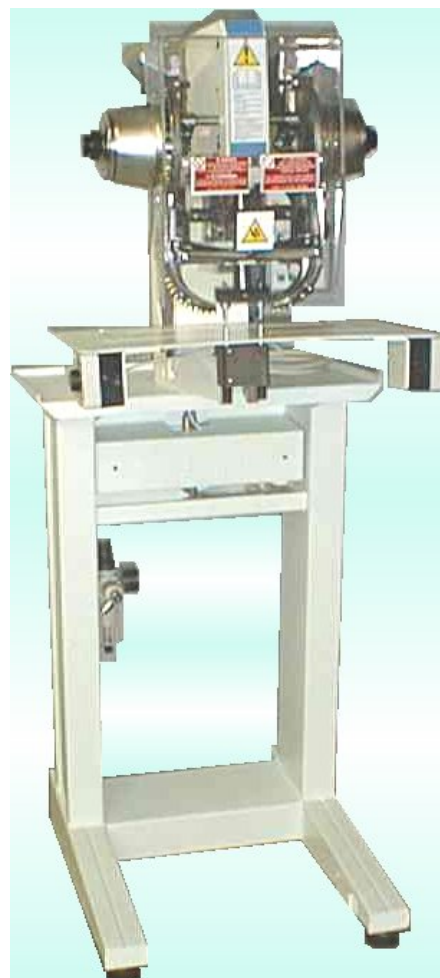

CHARACTERISTICS		ELECTROPNEUMATIC		MOTOR
Theor speed rate	c/1'	//	100	180
Working clearance	mm	10		
Depht	mm	180		
Working plane h	mm	970		
Overall dimension	mm	550x650x1370		
Weight	Kp		95	105
Air consumption	NI/6ba	//	3 NI/cycle	//
Motor rating	Kw	//	//	0.37 Triphase
Tension		//	220 V. singlephase	

IAMET Srl

Via Cascina dei Ferrandi n° 85 21044 Cavaria con Premezzo (Va) ITALIA
TEL.+39 0331 217236 e-mail: info@iametsrl.com



S.920/131 Rivetting machine

Rivetting machine double head with variable interaxe for the application of rivets to set mecahnims on cardboards. The same rivet executes the perforation on the material during the application.

MODELS

Electropneumatic: tension 220V single phase, pression 6 bar.

Cod.80920998

Electrical with -INVERTER: tension 220 V singlephase

Cod.80920999I

The two versions are provided with an electronic program for a complete test of the cycle; (starting signals, security device, electropneumatic valves, are completely adjusted by a microprocessor). A lighting display with a counterpieces function allows the visualisation of any possible anomaly that the microprocessor could find.

The comand with double simultaneity buttons and the security device with the mobile screen guarantees the operator incolumity protecting the application zone.



CHARACTERISTICS		ELECTROPNEUMATIC	MOTOR
Theor speed rate	c/1'	100	180
Working clearance	mm	30	
Interaxe application	mm	Min.70----Max440	
Working plane h	mm	1050	
Overall dimension	mm	1350x700x1500	
Weight	Kp	285	
Air consumption	NI/6bar	3 NI/cycle	//
Motor rating	Kw	//	0.37 Threephase
Tension		220 V. singlephase	

IAMET Srl

Via Cascina dei Ferrandi n° 85 21044 Cavaria con Premezzo (Va) ITALIA
TEL.+39 0331 217236 e-mail: info@iametsrl.com



S.920 Rivetting machine

Rivetting machine for the application of rivets on shoes, leather, clothes, ecc. The rivet, where allowed, pierces the material during the application.

MODELS

Pedal: version with mechanical action by a slight effort develops a remarkable strength during the application.

Cod.80920941/Cod.80920951

Electropneumatic: tension 220V singlephase, pression 6 bar.

Cod.80920942/Cod.80920952

Electrical with -INVERTER: tension 220 V singlephase

Cod.80920947/Cod.80920957

The two versions are equipped with an electronic program for the complete management of the application's cycle; (starting signals, security advice electropneumatic valves, etc. are entirely governed by a microprocessor.) A lighting display with counterpieces's function allows the visualisation of any possible anomaly that the microprocessor could find.

The security's device with mobile screen guarantees the operator's incolumity protecting the application's zone.



ACCESSORIES on request

Support plate

Cod.80980010

spot light (green led)

Cod.80165U00V

CHARACTERISTICS		PEDAL	ELECTROPNEUMATIC	MOTOR
Theor speed rate	c/1'	//	100	180
Working clearance	mm	15	30	
Depth	mm		180	
Working plane height	mm	1060	970	
Overall dimension	mm	500x650x1490	550x650x1370	
Weight	Kp	70	85	95
Air consumption	NI/6bar	//	3 NI/cycle	//
Motor rating	Kw	//	//	0.37 Threephases
Tension			220 V. singlephase	


IAMET Srl

Via Cascina dei Ferrandi n° 85 21044 Cavarina con Premezzo (Va) ITALIA
TEL.+39 0331 217236 e-mail: info@iametsrl.com

Manual presses

Series of table presses very versatile that allow the utilisation of dies named dies "C", including : spherical punches and hollow punches, dies for eyelets, rivets, pressions's buttons in all forms and dimensions. Special dies for application also in different fields that can find a great utilisation.

S.5	Cod.80005000
S.5/60	Cod.80005981
S.4	Cod.80004000
S.3	Cod.80003000
S.2	Cod.80002000

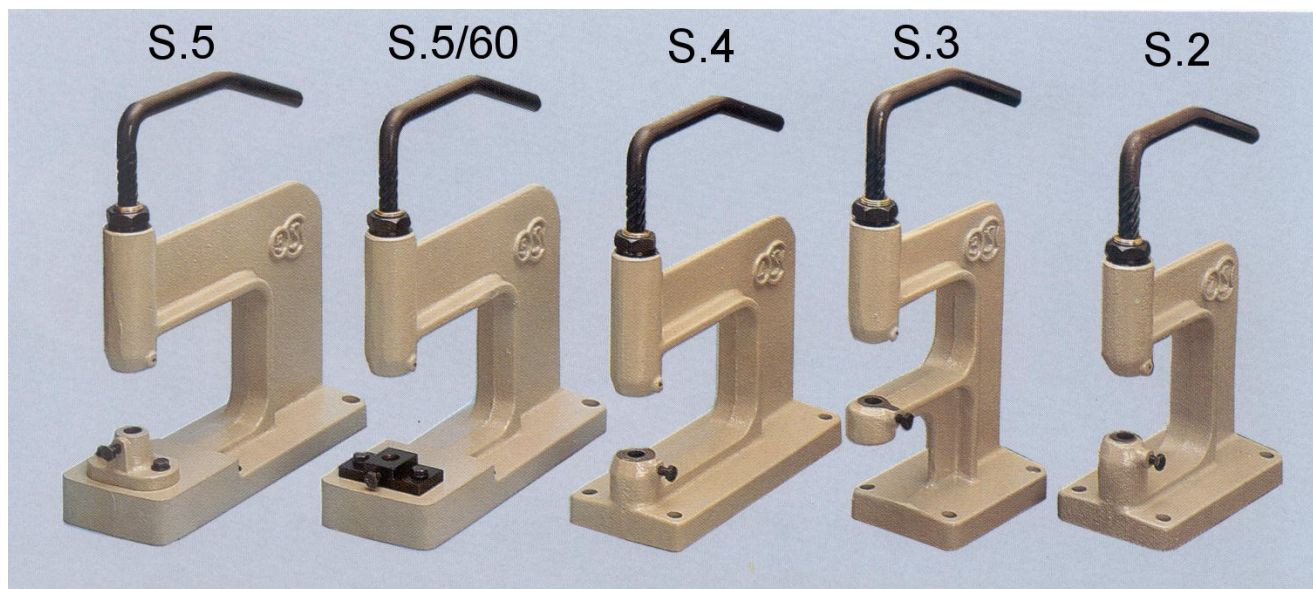

CHARACTERISTICS		S.5	S.5/60	S.4	S.3	S.2
Working clearance		44	60	44		
Depht		130			95	85
Overall dimension		90x250x290		90x230x290	90x180x320	90x170x280
Weight		4,6		3,5	3	2,8

IAMET Srl

Via Cascina dei Ferrandi n° 85 21044 Cavaria con Premezzo (Va) ITALIA
TEL.+39 0331 217236 e-mail: info@iametsrl.com

Pneumatic press

Kit composed by a pneumatic cylinder, treadle pedal, connections, security valve that from the hand press base model S.5, could change it from manual actionnement to pneumatic one. It is a very versatile presse and allows the utilisation of dies named dies "C", including: spherical punches, hollow punches, dies for eyelets, rivets, presson buttons of every shape and dimension.


MODELS

Pneumatic: Cod.80005983

version with pneumatic pedal, complete of the security device with mobile screen that guarantees the operator incolumity protecting on the application area.

ACCESSORIES

Table Cod. 80090200
Spot light point Cod.80165UP0V
Support plate, Cod.80220000T

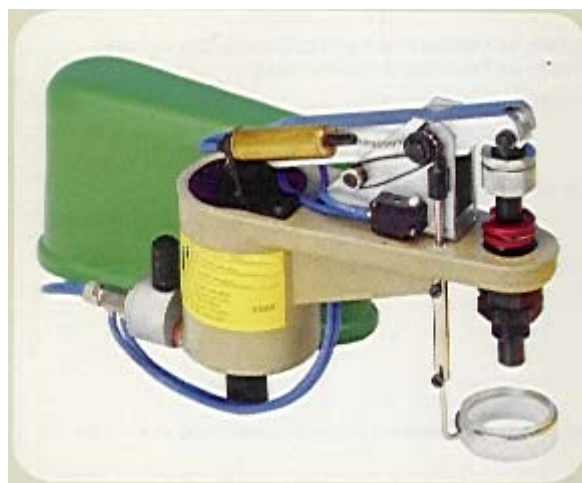

CHARACTERISTICS		Base S-4	Base S-5	Base S-5/60
Theor speed rate		30		
Working clearance		44	44	60
Depht		130		
Overall dimension		120x290x360		
Pression working		5 bar		
Weight		7,5	8	8

IAMET Srl

Via Cascina dei Ferrandi n° 85 21044 Cavaria con Premezzo (Va) ITALIA
TEL.+39 0331 217236 e-mail: info@iametsrl.com